

Power Par Light 10W**Technical**

Part Number	FPP01W01HPQA10	FPP01WW01HPQA10
Color	Cool White	Warm White
CCT (Typ.)	5500~6000K	2800~3300K
Input Voltage	110~240VAC	
Rated Current	800mA	
Rated Frequency	50~60 Hz	
Luminous Output (Lm / W)	750	100
Luminous Efficacy (Lm / W)	75	70
Total Power (W)	10 (Max.)	
Beam Angle	45°	
Operating Temperature	-40°C to 50°C (-4°F to 122°F)	
Starting Temperature	-40°C to 50°C (-4°F to 122°F)	
Rated Life	30,000 hour potential life at 85 % lumen maintenance	
Base	E26 / E27	

Light Source**Construction**

LED	High Power 10W	Housing	Die-cast Aluminum
Color Rendering Index (Ra)	≥ 75	Finishes	Sliver

Dimensions**Accessories**

∅ 120 x H : 140 (mm)	None
----------------------	------


Packing

Product Weight (kg)	0.13
Box Dimension(L×W×H) (cm)	14 x 14.5 x 15.5
Pcs/Box	Individual
Gross Weight (kg)	0.26


Remark:

1. Contents and specifications are subject to change without prior notice.

Dimensions

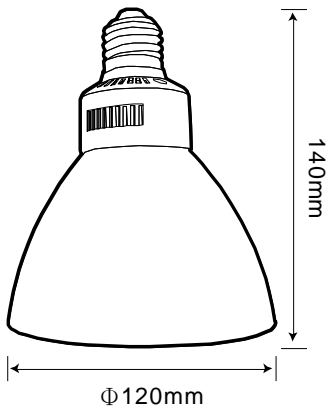


Light Pattern

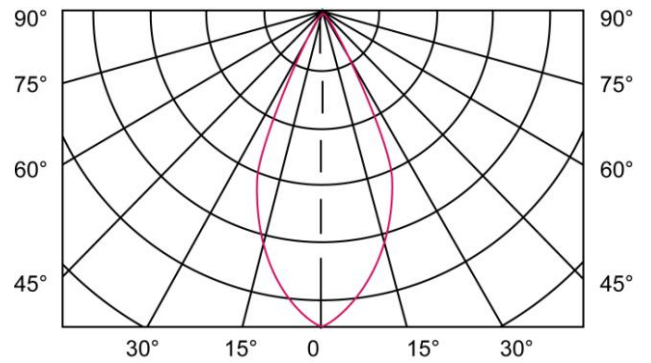

Beam & Cone Data

Cool White (5500K)

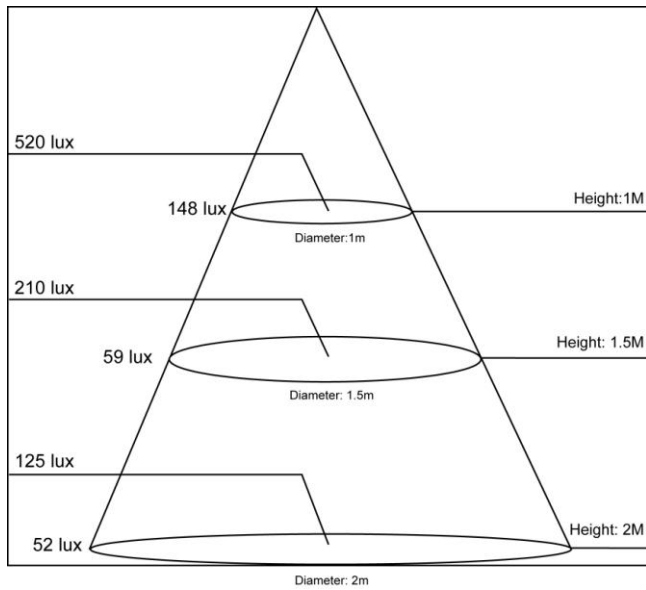

Warm White (3000K)

