

Power Low Bay 30 W**Technical**

| | | |
|--------------------------|---|-----------------|
| Part Number | FHB01W01HPUA30 | FHB01WW01HPUA30 |
| Color | Cool White | Warm White |
| CCT (Typ.) | 5600~6000K | 2800~3300K |
| Input Voltage | 110~240 VAC | |
| Rated Current | 2.4 A | |
| Rated Frequency | 50~60 Hz | |
| Luminous Output (Lm) | 2250 | 2100 |
| Luminous Efficacy (Lm/W) | 75 | 70 |
| Total Power (W) | 30W (Max.) | |
| Beam Angle | 120° | |
| Operating Temperature | -40°C to 50°C (-40°F to 122°F) | |
| Starting Temperature | -40°C to 50°C (-40°F to 122°F) | |
| Rated Life | 30,000 hour potential life at 70% lumen maintenance | |

Light Source**Construction**

| | | | |
|----------------------------|----------------|----------|-------------------|
| LED | High Power 30W | Housing | Die-cast Aluminum |
| Color Rendering Index (Ra) | ≥ 75 | Finishes | Silver |

Dimensions**Accessories**

| | |
|----------------------|------|
| ∅ 340 x H : 200 (mm) | None |
|----------------------|------|


Packing

| | |
|-------------------------------|------------------|
| Product Weight (kg) | 1.16 |
| Packing Dimension(L×W×H) (cm) | 38 x 37.5 x 26.5 |
| Pcs/Box | Individual |
| Gross Weight (kg) | 2.34 |


Remark:

- Contents and specifications are subject to change without prior notice.

Dimensions

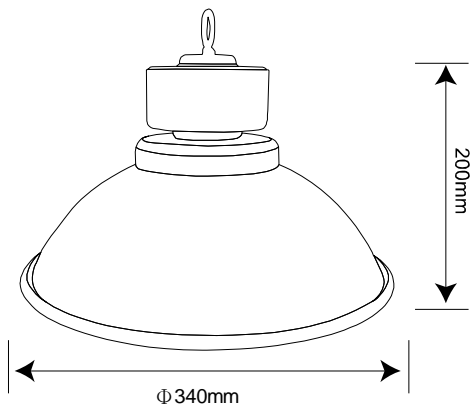


Light Pattern

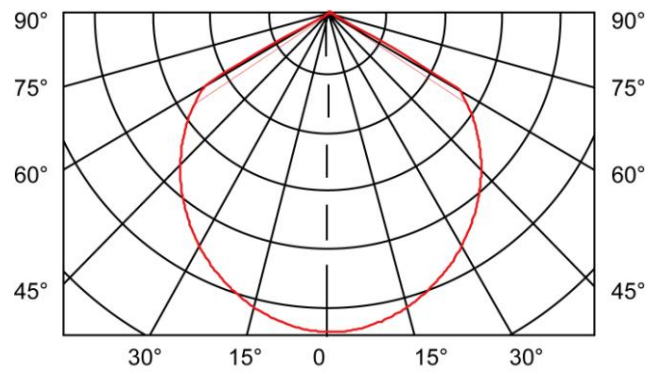

Beam & Cone Data

Cool White (5500K)

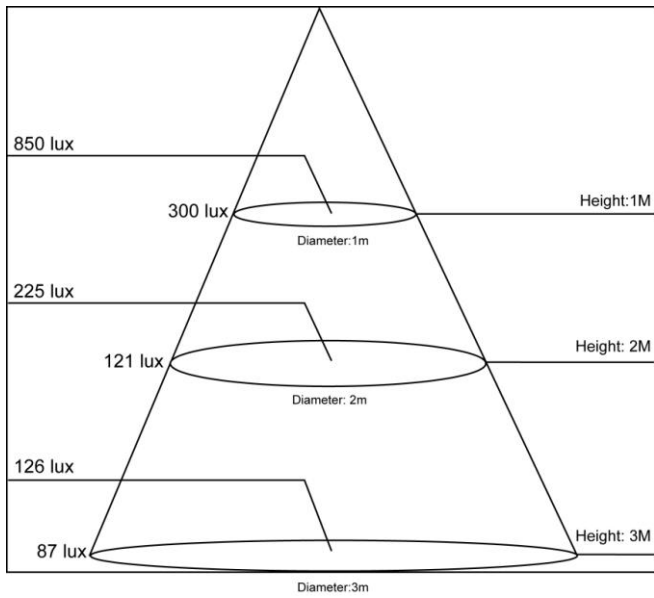

Warm White (3000K)

