

Solar Street Light 30 W



Technical

Part Number	FPR04W01HPVA30	FPR04WW01HPVA30
Color	Cool White	Warm White
CCT (Typ.)	5600~6000K	2800~3300K
Input Voltage	DC 12V	
Rated Current	2.5 A	
Rated Frequency	50~60 Hz	
Luminous Output (Lm)	2250	2100
Luminous Efficacy (Lm/W)	75	70
Total Power (W)	30W	
Beam Angle	120°	
Operating Temperature	-40°C to 50°C (-40°F to 122°F)	
Starting Temperature	-40°C to 50°C (-40°F to 122°F)	
Rated Life	30,000 hour potential life at 70% lumen maintenance	

Light Source

Construction

LED	High Power 30W	Housing	Die-cast Aluminum
Color Rendering Index (Ra)	≥ 75	Finishes	Gray

Dimensions

Accessories

L : 420 x W : 220 x H : 120 (mm)	None
----------------------------------	------


Packing

Product Weight (kg)	3.5
Packing Dimension(L×W×H) (cm)	38 x 37.5 x 26.5
Pcs/Box	Individual
Gross Weight (kg)	4.3

Remark:

1. Contents and specifications are subject to change without prior notice.
2. 110~240 VAC version is available upon request

Dimensions

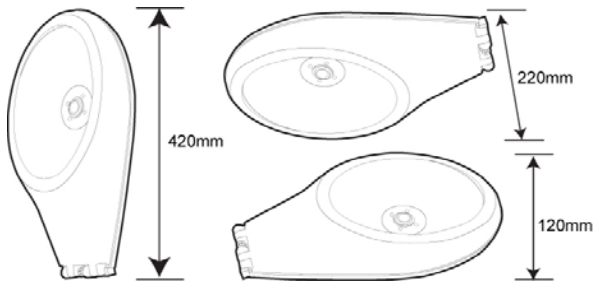

Light Pattern

