

Power Down Light 30W-V2



Technical

Part Number	FPD08W01HPUA30-1	FPD08WW01HPUA30-1
Color	Neutral White / Cool White	Warm White
CCT (Typ.)	4000~6000K	2800~3300K
Input Voltage	110~240 VAC	
Rated Current	2.4 A	
Rated Frequency	50~60 Hz	
Luminous Output (Lm)	2250	2100
Luminous Efficacy (Lm/W)	75	70
Total Power (W)	30W (Max.)	
Beam Angle	140°	
Operating Temperature	-35°C to 60°C (-95°F to 140°F)	
Rated Life	30,000 hour potential life at 80% lumen maintenance	
Driver	Dimmable (Optional)	

Light Source

LED	High Power 30W	
Color Rendering Index (Ra)	≥ 75 (Standard)	≥ 90 (Optional for warm white)

Dimensions

Body	∅ 225 x H : 128.5 (mm)
Aperture Diameter	210-215(mm)
Outside Diameter	225(mm)

Construction

Housing	Die-cast Aluminum
Finishes	Silver
Diffuser	Frosted


Packing

Product Weight (kg)	1.1
Packing Dimension(L×W×H) (cm)	23.5 x 24 x 17.3
Pcs/Box	Individual
Gross Weight (kg)	1.35


Remark:

1. Contents and specifications are subject to change without prior notice
2. To order dimmable or high CRI version, please contact with Color Vision for more information
3. External driver included

Dimensions

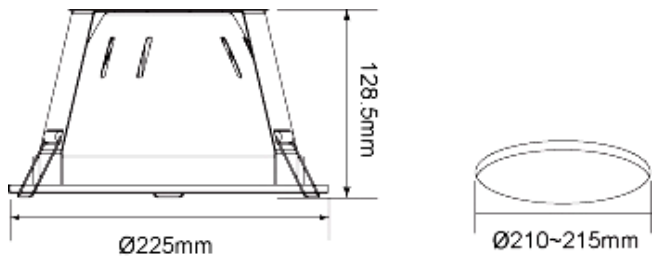


Light Pattern

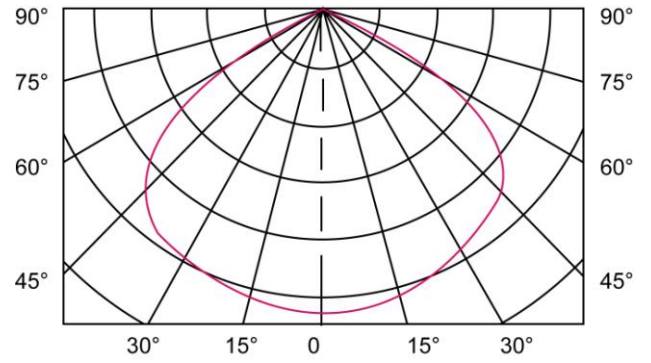

Beam & Cone Data

Cool White (5500K)

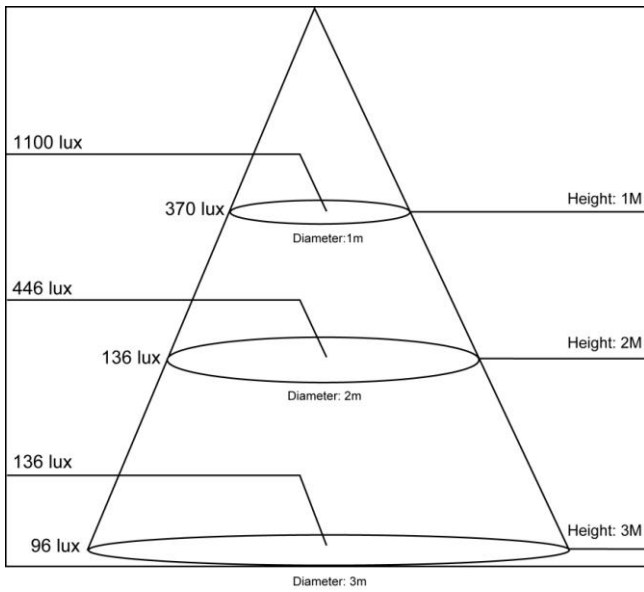

Warm White (3000K)

