



Power Down Light 15W-V4 Benefits:

- Luxtreme Series / **High Light Output** / Best at 3.5 Meters Height
- Extremely Low Operation Cost / Energy Efficient (15W VS 60W)
- **ONE LED Module** / Natural Illumination / **Non-Flickering**
- Closest to Gas Tube Lighting / **No Multiple Shadows**
- **Fixture Acts as Heat Sink** / LED is only 5°C more than Surface
- Super Long Life / Zero Maintenance
- Simple Design / Solid Construct / **New Elegant Casing & Reflector**
- **Constant Current Design**
- Environmentally Friendly / No Toxic / Reduce Waste
- Application: All Indoor Recessed Lighting.

Power Down Light 15W-V4


FPD10WHPWA15 (White)
FPD10WWHPWA15 (Warm White)



Specification Features

Color Range	White, Warm White
Dimensions	Φ197mm x H97mm
Light Source	10W High Power LED
Housing	Die-casting aluminum
Operating Temperature	-40°C to 50°C (-40°F to 122°F)
Starting Temperature	-40°C to 50°C (-40°F to 122°F)
IP Rating	IP40
LED source life	50, 000 hours
Design	Recessed mount
Accessory	15W LED Driver AC110~240V
Weight	800g (including Driver)

Physical Dimensions

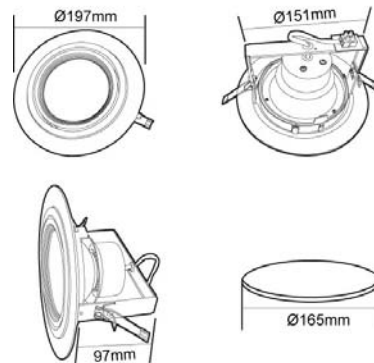

Electrical

Power Input	AC 110V~240V	Control Mechanism	None
DC Current	1.35A	Controller	None
Power Consumption	15W	Data Wiring	None

Optical

Lens	None
Beam Angle	140°
Light Distribution	Symmetric direct illumination

LED Output

Color	Wavelength (nm)	Color Temp. (Typical)	Light Output (Lm)	Efficacy (Lm/W)
White	-	5600~6000K	1125	75
Warm White	-	2800K 3000K 3300K	1050	70