




Power Down Light 30R-V1 Benefits:

- Luxtreme Series / **High Light Output** / Best at **3~4 Meter Height**
- Extremely Low Operation Cost / Energy Efficient (30W VS 120W)
- **ONE LED Module** / Natural Illumination / **Non-Flickering**
- Closest to Gas Tube Lighting / **No Ghost Effect**
- **Fixture Acts as Heat Sink** / LED is only **10°C more than Surface**
- Super Long Life / Zero Maintenance
- Simple Design / Solid Construct / New Elegant Casing & Reflector
- **Constant Current Design**
- Environmentally Friendly / No Toxic / Reduce Waste
- CO2 Reduction (based on 50,K Hour): **2871KG =** 
- Mercury Reduction (compared to fluorescent): **41.67mg**
- Application: All Indoor Recessed Lighting.

Power Down Light 30R-V1


FPD08-W01HP-UA30 (White, 100°)
 FPD08-WW01HP-UA30 (Warm White, 100°)



Specification Features

Color Range	White, Warm White
Dimensions	Φ232mm x H135mm
Light Source	30W High Power LED
Housing	Die-casting aluminum
Operating Temperature	-40°C to 50°C (-40°F to 122°F)
Starting Temperature	-40°C to 50°C (-40°F to 122°F)
IP Rating	IP40
LED source life	50, 000 hours
Design	Recessed mount
Accessory	30W LED Driver AC110~240V
Weight	900g

Physical Dimensions

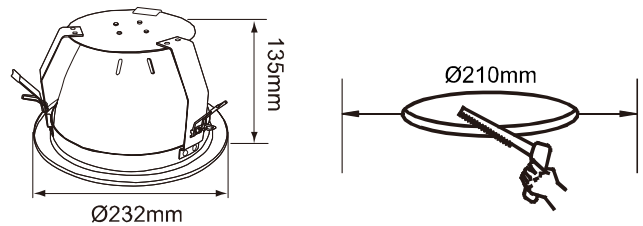

Electrical

Power Input	AC 110V~240V	Control Mechanism	None
DC Current	2.7A.	Controller	None
Power Consumption	30W	Data Wiring	None

Optical

Lens	None
Beam Angle	100°
Light Distribution	Symmetric direct illumination

Light Output

Color	Wavelength (nm)	Color Temp. (Typical)	Light Output (Lm)	Efficacy (Lm/W)
White	-	5600~6000K	1950	65
Warm White	-	2800K 3000K 3300K	1800	60