



Power T-Bar Panel 4PL 45W Benefits:

- **Extreme High Light Output** / Best at 2.5 Meter Height
- Extremely Low Operation Cost / Energy Efficient (45W VS 150W Fluorescent)
- Retrofit to standard T-Bar Panel
- Natural Illumination/ **Non-Flickering**
- **Generate Low Heat / Dimmable Module /**
- Super Long Life / Zero Maintenance
- Environmentally Friendly / No Toxic / Reduce Waste
- CO2 Reduction (based on 50,K Hour): **2552KG =** 
- Mercury Reduction (compared to fluorescent): **166.68mg**
- Application: All Indoor Lighting

Power T-Bar Panel 4PL 45W

FLP01W576SMDHA (White,4PL)



Specification Features

Color Range	White
Dimensions	L600mm x W600mm x H65mm
Light Source	576pcs of 3528 SMD LED
Housing	None
Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Starting Temperature	-10°C to 50°C (14°F to 122°F)
IP Rating	IP40
LED source life	50, 000 hours
Accessory	None
Weight	3.3kg

Physical Dimensions

Electrical

Power Input	AC110~240V	Control Mechanism	None
DC Current	2.6A	Controller	None
Power Consumption	45W	Data wiring	Easy Connect





Optical

Lens	None
Beam Angle	120°

Light Output

Color	Color Temp. (Typical)	Light Output (Lm)	Efficacy (Lm/W)
White	6700K	3157	70.2
	6400K		
	5700K		

Isolux Curve

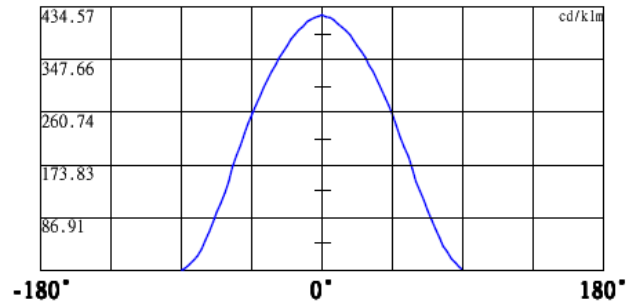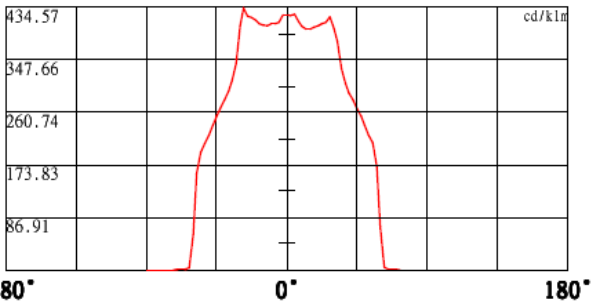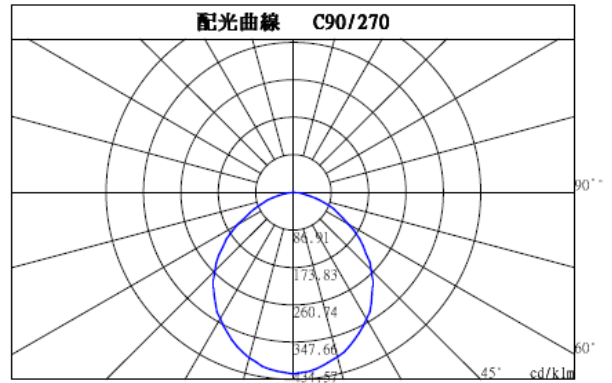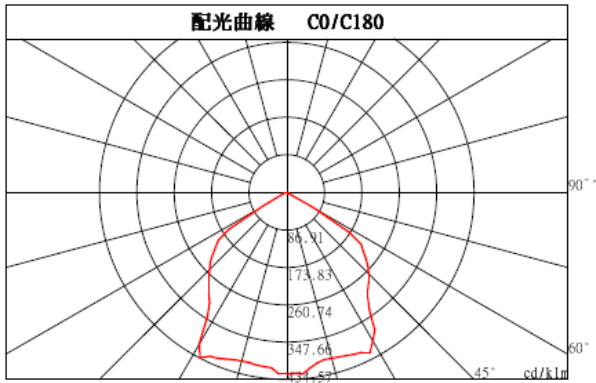

Illumination

