

**Power Down Light 15W-W1****Technical**

|                          |   |                 |
|--------------------------|---|-----------------|
| Part Number              | FPD11W01HPWA15                                      | FPD11WW01HPWA15 |
| Color                    | Cool White  | Warm White      |
| CCT (Typ.)               | 5600~6000K  | 2800~3300K      |
| Input Voltage            | 110~240 VAC   |                 |
| Rated Current            | 1.2 A   |                 |
| Rated Frequency          | 50~60 Hz  |                 |
| Luminous Output (Lm)     | 1125  | 1050            |
| Luminous Efficacy (Lm/W) | 75  | 70              |
| Total Power (W)          | 15W (Max.)  |                 |
| Beam Angle               | 140°  |                 |
| Operating Temperature    | -40°C to 50°C (-40°F to 122°F)                      |                 |
| Starting Temperature     | -40°C to 50°C (-40°F to 122°F)                      |                 |
| Rated Life               | 30,000 hour potential life at 70% lumen maintenance |                 |
| Driver                   | Dimmable (Optional)                                 |                 |

**Light Source**

|                            |                 |                                  |
|----------------------------|-----------------|----------------------------------|
| LED                        | High Power 15W  |                                  |
| Color Rendering Index (Ra) | ≥ 75 (Standard) | ≥ 90 ( Optional for warm white ) |

**Dimensions**

|                   |                     |
|-------------------|---------------------|
| Body              | Ø 175 x H : 84 (mm) |
| Aperture Diameter | 150 (mm)            |
| Outside Diameter  | 175 (mm)            |

**Construction**

|          |                   |
|----------|-------------------|
| Housing  | Die-cast Aluminum |
| Finishes | White             |
| Diffuser | Clear             |


**Packing**

|                               |              |
|-------------------------------|--------------|
| Product Weight (kg)           | 0.4          |
| Packing Dimension(L×W×H) (cm) | 22 x 21 x 15 |
| Pcs/Box                       | Individual   |
| Gross Weight (kg)             | 0.55         |


Remark:

1. Contents and specifications are subject to change without prior notice.
2. To order dimmable or high CRI version, please contact with Color Vision for more information
3. External driver included

Dimensions

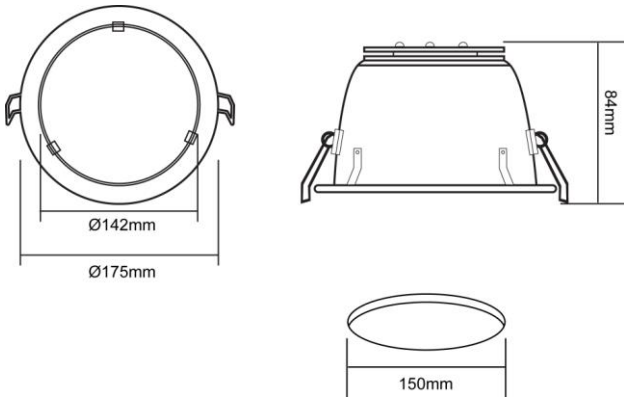


Light Pattern

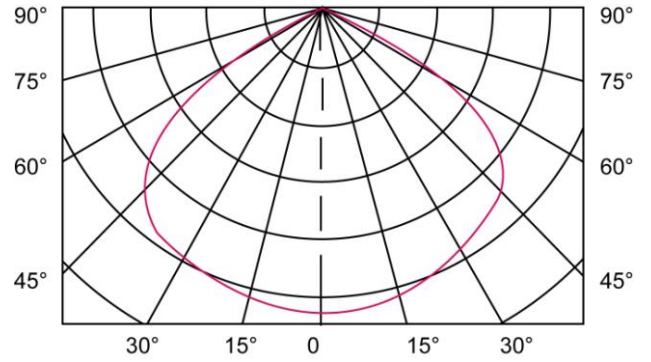

Beam & Cone Data

Cool White ( 5500K )

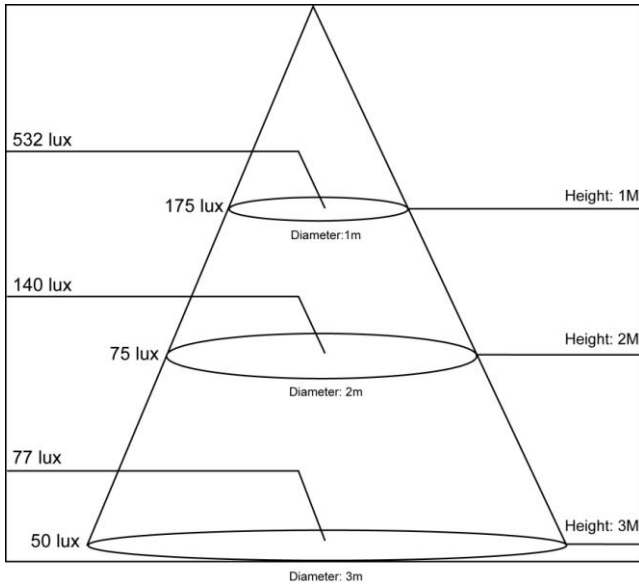

Warm White ( 3000K )

